


# Accessories for pneumatic atomizing nozzles

## Series 136.1 to 136.6




### Overview of accessories

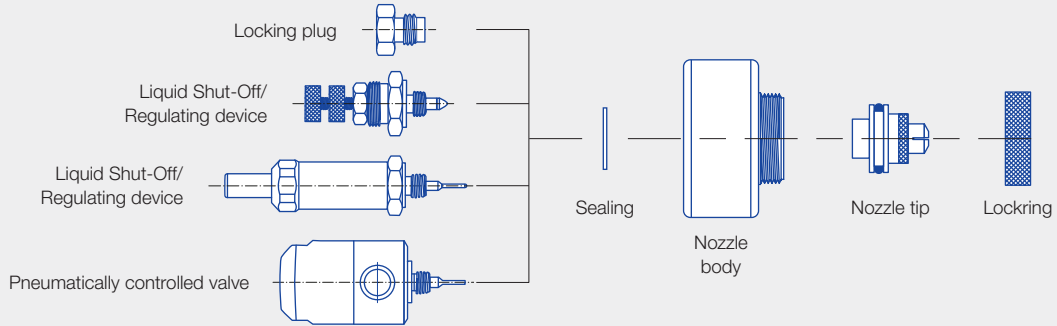

### Regulating device and shut-off needle

Enables manual regulation of the flow rate and closing of the nozzle.

Material: Stainless steel 303  
Weight: 33 g



### Ordering no.

Type


**013.600.16**

Suitable for all nozzles of series 136

### Regulating device with quick-cleaning needle

Enables manual regulation of the flow rate and cleaning of the nozzle orifice.

Material: Stainless steel 303  
Weight: 75 g

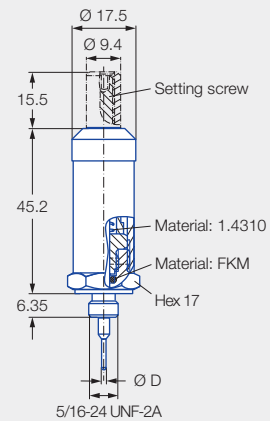

### Ordering no.

Type

**013.601.16.30**

**013.602.16.30**

**013.603.16.30**

**013.604.16.30**

**013.605.16.30**

**013.606.16.30**

For nozzles

136.xx1

136.xx2

136.xx3

136.xx4

136.xx5

136.xx6

Needle diameter  
D  
[mm]

2.1

1.2

0.8

0.6

0.4

0.3






**Pneumatically controlled valve. Opening pressure 2.1 bar, max. 180 cycles/min.**

External control system via separate compressed air connection for switching the nozzle on and off.

Material: Stainless steel 303  
Weight: 230 g



Ordering no.		
Type	For nozzles	Needle diameter D [mm]
<b>013.601.16.10</b>	136.xx1	2.1
<b>013.602.16.10</b>	136.xx2	1.2
<b>013.603.16.10</b>	136.xx3	0.8
<b>013.604.16.10</b>	136.xx4	0.6
<b>013.605.16.10</b>	136.xx5	0.4
<b>013.606.16.10</b>	136.xx6	0.3