

ENGINEERING  
YOUR SPRAY SOLUTION



**NEW SERIES**

## Spillback Nozzles Series 290



**Fine atomization.  
Without compressed air.**

- Even finer droplets for shortest evaporation distances
- Optimized design
- High flow rate turn-down ratio



**Spray angle of the individual nozzles**  
90° as hollow cone



**High turn-down ratio**  
of up to 12:1




**Low operating costs**  
as no atomizing air required



**Even and fine liquid atomization**  
over the entire control range



**Typical pressure range**  
of 35 bar, g in the supply line at the nozzle

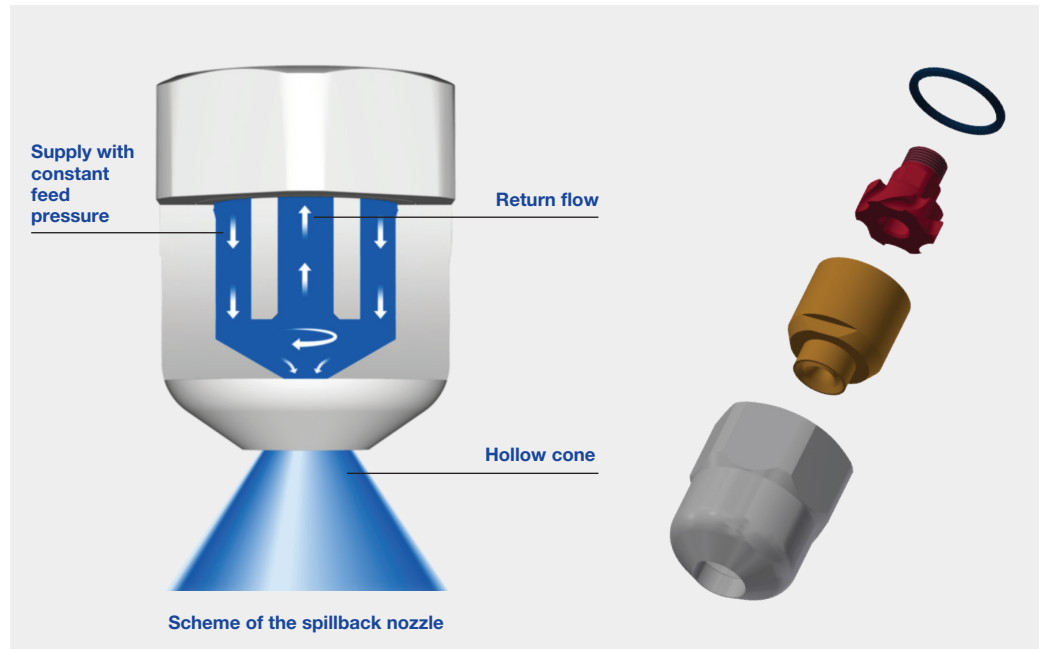


Lechler spillback nozzles atomize liquids as a fine hollow cone.

This special single-fluid nozzle works according to the pressure atomization principle.

The amount of atomized liquid is adjusted via a control valve in the return line of the valve skid unit, whereby part of the flow is taken from the feed flow rate and returned to the tank. The maximum atomized flow rate is achieved with the control valve closed.

Uniform and fine liquid atomization is achieved from minimum to maximum injection.

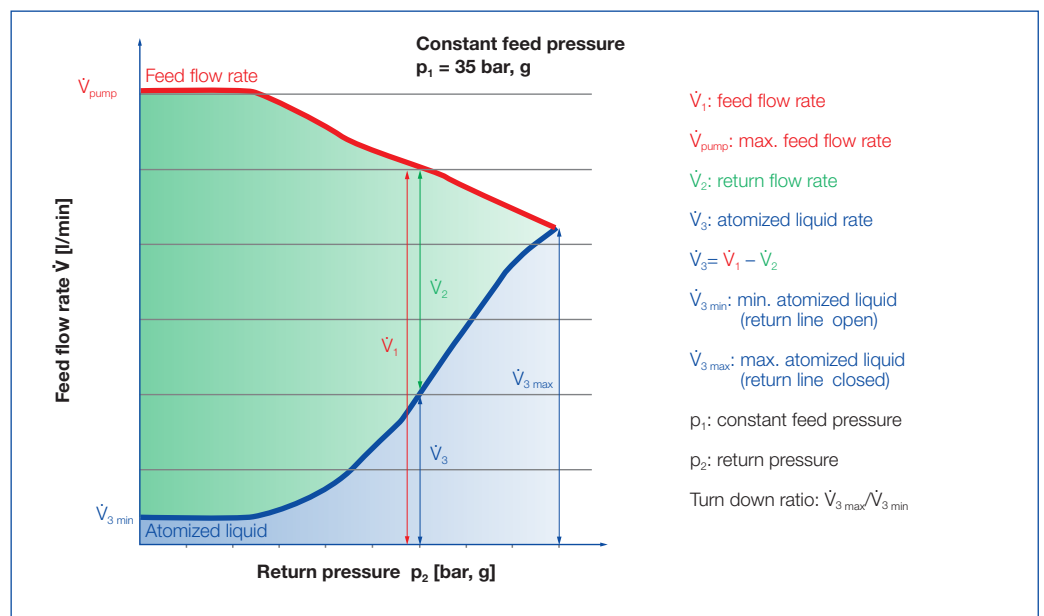

**Advantages in design:**

- Gas flow optimized housing
- Water flow optimized
- Low built-ups design
- Less single parts
- Mounting of nozzle with standard tools, no special tool necessary
- Simpler installation
- Nozzles are interchangeable on the lance



**CASE STUDY**

» Several design calculation for gas cooling towers have shown that an average reduction of 30% in evaporation distance is possible. With the revolutionary design of spillback nozzles 290 series, the significant smaller droplets can achieve up to 50% shorter evaporation distance.

» Due to optimized evaporation distance, the spillback system can be offered in way more process cases as an alternative to twin-fluid system. The spillback nozzles are now also suitable for smaller GCTs and as well as capacity upgrades.

» Our new generation of Spillback nozzles bring proven technology to a higher level.




**Inlet**

Gas flow rate 110.000 Nm<sup>3</sup>/h  
Temperature 370°C  
Tower diameter 5 m

**Evaporation distance with previous design of spillback nozzles**

13.7 m



**Evaporation distance with new design of spillback nozzles**

9.5 m





**Outlet**

Temperature 150°C

**PROCESS GUARANTEE**

We exactly know what our nozzles can do and can therefore offer our gas cooling systems with guarantees on your requested outlet temperature with complete evaporation.

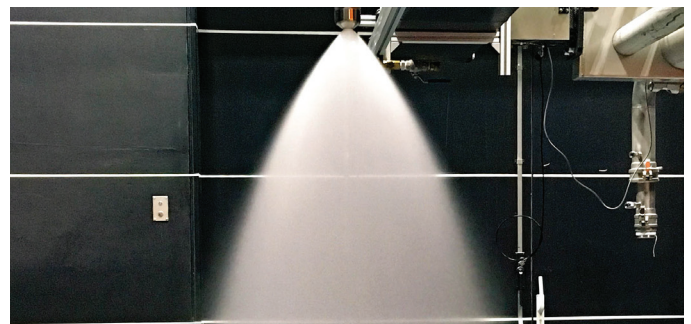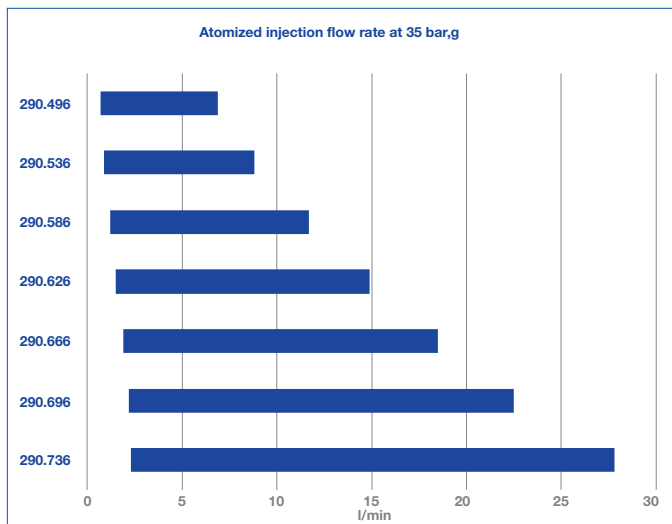

Spillback line closed (max. injection), spray angle approx. 80 – 85°




Spillback line open (min. injection), spray angle approx. 100°

**ENGINEERING  
YOUR SPRAY SOLUTION**



## LECHLER WORLDWIDE

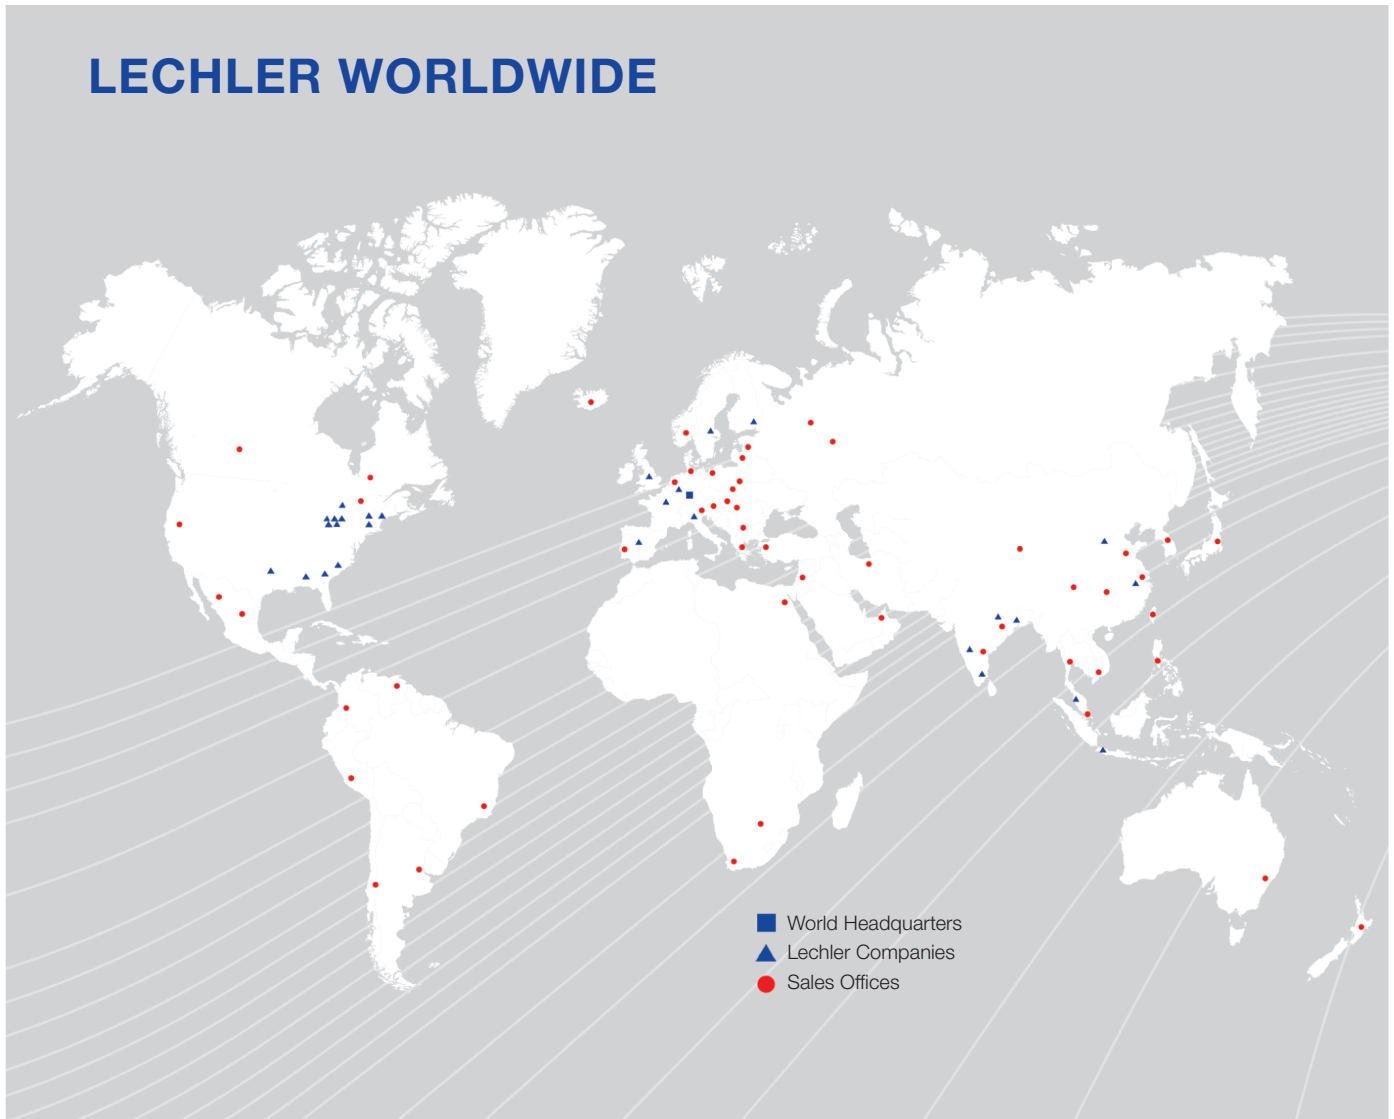

### **Lechler GmbH · Precision Nozzles · Nozzle Systems**

**P.O. Box 13 23 · 72544 Metzingen, Germany · Phone: +49 7123 962-0 · Fax: +49 7123 962-301 · info@lechler.de · www.lechler.com**

**ASEAN:** Lechler Spray Technology Sdn. Bhd. · No. 23, Jalan Teknologi 3/3A · Taman Sains Selangor 1 · Kota Damansara, PJU 5 · 47810 Petaling Jaya · Malaysia · info@lechler.com.my

**Belgium:** Lechler S.A./N.V. · Avenue Mercator 6 · 1300 Wavre · Phone: +32 10 225022 · Fax: +32 10 243901 · info@lechler.be

**China:** Lechler Intl. Trad. Co. Ltd. · Beijing · Rm. 418 Landmark Tower · No. 8 Dong San Huan Bei Lu · Phone: +86 10 84537968, Fax: +86 10 84537458 · info@lechler.com.cn

**Finland:** Lechler Oy · Jäspilänkatu 18 · 04250 Kerava · Phone: +358 207 856880 · Fax: +358 207 856881 · info@lechler.fi

**France:** Lechler France, S.A. · Bât. CAP2 · 66-72, Rue Marceau · 93558 Montreuil · Phone: +33 1 49882600 · Fax: +33 1 49882609 · info@lechler.fr

**Great Britain:** Lechler Ltd. · 1 Fell Street, Newhall · Sheffield, S9 2TP · Phone: +44 114 2492020 · Fax: +44 114 2493600 · info@lechler.com

**India:** Lechler (India) Pvt. Ltd. · Plot B-2 · Main Road · Wagle Industrial Estate · Thane (W) · 400604 · Phone: +91 22 40634444 · Fax: +91 22 40634497 · lechler@lechlerindia.com

**Italy:** Lechler Spray Technology S.r.l. · Via Don Dossetti 2 · 20080 Carpiano (MI) · Phone: +39 02 98859027 · Fax: +39 02 9815647 · info@lechleritalia.com

**Spain:** Lechler S.A. · Avda. Pirineos 7 · Oficina B7, Edificio Inbisa I · 28700 San Sebastián de los Reyes, Madrid · Phone: +34 91 6586346 · Fax: +34 91 6586347 · info@lechler.es

**Sweden:** Lechler AB · Kungsängsvägen 31 B · 753 23 Uppsala · Phone: +46 18 167030 · Fax: +46 18 167031 · info@lechler.se

**USA:** Lechler Inc. · 445 Kautz Road · St. Charles, IL, 60174 · Phone: +1 630 3776611 · Fax: +1 630 3776657 · info@lechlerUSA.com